

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 October 2004 (14.10.2004)

PCT

(10) International Publication Number
WO 2004/088835 A1

(51) International Patent Classification⁷: **H03D 7/14**

(74) Agent: BYSTRÖM, Linus; Ström & Gulliksson IPC AB,
P.O. Box 793, S-220 07 Lund (SE).

(21) International Application Number:

PCT/SE2004/002654

(22) International Filing Date: 15 March 2004 (15.03.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

03007555.0 1 April 2003 (01.04.2003) EP
60/459,504 1 April 2003 (01.04.2003) US

(71) Applicant (for all designated States except US): TELEFONAKTIEBOLAGET L M ERICSSON (PUBL) [SE/SE]; SE-126 25 Stockholm (SE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SJÖLAND, Henrik [SE/SE]; Södervängsvägen 131A, S-246 36 Löddeköpinge (SE). TILLMAN, Fredrik [SE/SE]; Kulgränden 5B, S-226 49 Lund (SE).

[Continued on next page]

(54) Title: PASSIVE MIXER

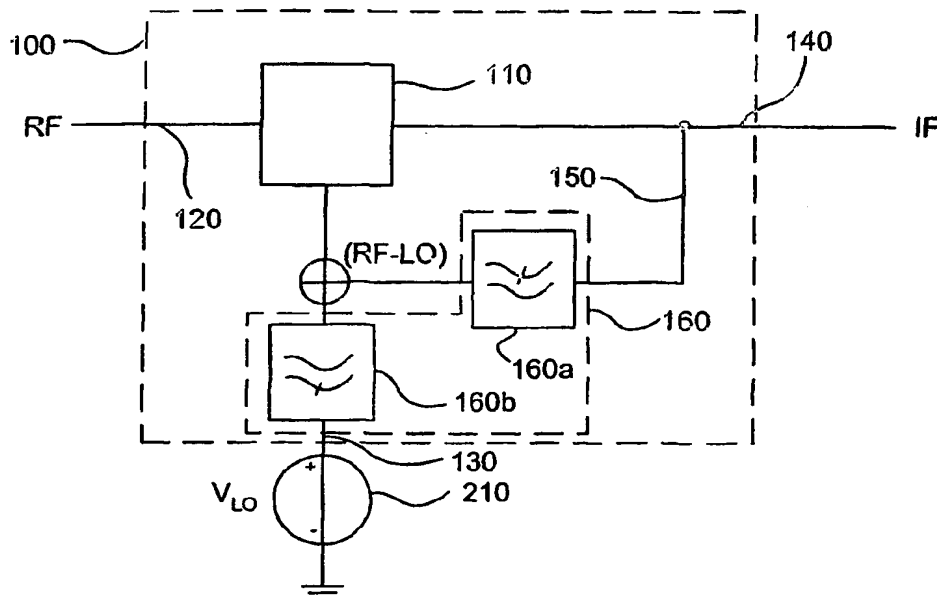

(57) Abstract: A passive mixer (100) for converting a radio frequency (RF) signal to an intermediary frequency (IF) signal or vice versa. The mixer comprises a voltage controlled mixing means (110) for mixing a local oscillator signal with either an RF or IF signal. A bootstrapping technique is used for feeding back a low frequency component of the IF signal through a low-pass filter (160) to the mixing means (110). The mixing means (110) will follow low frequency variations of the IF signal, which will improve the linearity of the mixer.

WO 2004/088835 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

3/pet
JC20 Rec'd PCT/PTO 19 SEP 2005

PASSIVE MIXER

Technical Field of the Invention

The present invention relates to a passive mixer, and
5 more particularly to a passive mixer having a configuration
for improved linearity.

Description of Related Art

A mixer for converting a signal having a first
10 frequency, such as radio frequency (RF), to a signal having
a second frequency, such as an intermediary frequency (IF),
is provided in a wide variety of implementations, such as
in radio transceiver front-ends. Bluetooth® is a
communication standard where the major goal has been to
15 remove cable connections between electrical equipment. One
area, where Bluetooth® is of particular interest, is
communication involving portable equipment, such as mobile
terminals. The terminals may also be adapted to communicate
according to e.g. a telecommunication technology, such as
20 GSM, UMTS, cdma2000, PCS, DCS etc. A mixer may be necessary
for the radio transceiver front-end of the Bluetooth® radio
and the telecommunication radio.

In portable communication equipment, low power
solutions for all electronic components are important.
25 Thus, the tendency in integrated circuit design is to apply
low supply voltage for e.g. the mixer. Also, it is often
required that the implementation of the mixer is cheap. MOS
(Metal Oxide Semiconductor) technology offers a solution,
with which is possible to implement fully integrated
30 mixers. However, it is essential to find circuit
architectures capable of high performance at supply
voltages at or below 2V.

Frequency translation using mixing means can be
provided in either the current or the voltage domain using
35 a non-linear transfer. However, mixing can also be achieved

CONFIRMATION COPY

by applying multiplication in the time domain. In such a case the mixer can be viewed as a two-state machine, wherein the mixer should be as linear as possible in each state. This type of mixer represents a linear time-variant
5 system.

The switching from a conducting to a non-conducting state of a mixing means can be provided in either the current or the voltage domain. In case of bipolar technology, the current switching is superior. The MOSFET
10 (Metal Oxide Semiconductor Field Effect Transistor) transistor offers true voltage switch characteristics. Thus, it is feasible to perform the switching in the voltage domain for the MOSFET transistor.

Integrated analog circuits will in the future be
15 driven by lower supply voltages than today due to the CMOS (Complementary MOS) technology scaling and the system-on-chip trend, wherein a radio transceiver is provided on a single chip. This trend will enforce shared technology between the digital and analog domain, making low voltage
20 implementations necessary. In the receiver front-end, one major bottleneck is the linearity of the down-converting mixer. This is particularly the case for low supply voltages, even if a suitable topology is used, such as the passive CMOS mixer.

25 In operation, a MOSFET transistor is conducting when the gate-source voltage V_{gs} becomes larger than the threshold voltage V_T . A transistor receiving a RF signal on either its drain or source terminal may provide a varying source, or drain, node potential. Said potential will vary
30 in dependence of a signal provided on the gate input terminal, which often times is a local oscillator (LO) signal. Also, a RF leakage may occur. The critical signal is the intermediary frequency (IF) signal provided on the source/drain terminal, which will modulate the on-time of
35 the switch and cause non-linearity. A MOSFET transistor

switch operating in either the off state or as a triode (on state), will be controlled not only by the gate voltage, but also by the source voltage. Consequently the IF output signal provided at the source/drain will modulate the switch duty cycle and generate intermodulation products. This is especially severe for low supply voltages, which limit the achievable LO amplitude.

A common way to reduce the switch non-linearity is to use a complementary switch known as a transmission gate. However, such a switch will increase the load capacitance of a low noise amplifier (LNA), which often precedes the mixer of a receiver, resulting in lower conversion gain and smaller bandwidth. Furthermore, if the mixer is balanced, the complementary switch will only effect even order non-linearity.

Summary of the Invention

One object of the present invention is to provide a mixer having improved linearity compared to equivalent mixers known in the art. More specifically, it is an object of the invention to provide a mixer having improved linearity at low supply voltage, which may be implemented as an integrated circuit using on chip implementation technology, such as MOS (Metal Oxide Semiconductor) or JFET (Junction Field Effect Transistor) technology.

According to one aspect of the invention, the above objects are achieved by a passive mixer for converting a first signal having a first frequency to a signal having a second frequency. The mixer comprises mixing means, a first terminal, a second terminal, and a third terminal, for providing the second signal by mixing a third signal having a third frequency provided as input at the second terminal and the first signal provided as input at either the first or the third terminal. The second signal is provided as output at the terminal not receiving any input signal.

A feedback circuit is operatively connected to the third terminal and the second terminal.

The feedback circuit may be a bootstrap circuit. Furthermore, the feedback circuit may comprise a low-pass filter. Said filter may be a first order filter provided by a resistor and a capacitor.

The mixing means may be a voltage controlled switch, such as a FET transistor switch having either its drain or source operatively connected to the first terminal, its gate operatively connected to the second terminal, and either its source or drain operatively connected to the third terminal. The FET transistor may be a NMOS transistor having superior switch performance compared to a PMOS transistor.

The mixer may be provided as a balanced or non-balanced mixer. A balanced mixer may comprise four mixing means, wherein each of said means comprises a bootstrap circuit.

According to another aspect of the invention, the mixer is used in electronic equipment, such as a portable communication equipment. Portable equipment comprises, but is not limited to, a mobile radio terminal, a mobile telephone, a pager, or a communicator, i.e. a personal digital assistant, a smartphone, etc. The mixer may also be used in electronic equipment for communication in a wireless local area network, such as equipment adapted for short-range supplementary communication, e.g. according to Bluetooth® technology.

An advantage of the present invention is that no DC current flows through the mixing means. The absence of any DC current will reduce the 1/f noise of the mixer. The topology of the invention combined with MOS technology has the advantage that it is suitable for low voltage implementations, such as approximately 2V and below, as a MOS circuit does not use stacked transistors. As the supply

voltage will be further decreased in the future the invention will become even more important. Furthermore, the invention improves the linearity compared to mixers known in the art without sacrificing other important parameters, such as noise performance and conversion gain.

Further preferred embodiments of the invention are defined in the dependent claims.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

15 **Brief Description of the Drawings**

Further objects, features, and advantages of the invention will appear from the following description of several embodiments of the invention, wherein various aspects of the invention will be described in more detail with reference to the accompanying drawings, in which:

Fig. 1 is a front view of a mobile telephone and the environment in which it may operate;

Fig. 2 is a block diagram of the mixer according to the invention;

25 Fig. 3 is a block diagram of a first embodiment of the mixer according to the invention;

Fig. 4 is a block diagram of a second embodiment of the mixer according to the invention; and

30 Fig. 5 is a diagram illustrating measurement results of the mixer of Fig. 4.

Detailed Description of Embodiments

Fig. 1 illustrates a mobile telephone 1 as one exemplifying electronic equipment, in which the mixer according to the present invention may be provided, and a

possible environment in which it operates. The invention is not limited to a mobile telephone 1 but can be provided in a wide variety of electronic equipment wherein a mixer is required for converting a first signal having a first
5 frequency, such as an intermediary frequency (IF) or a radio frequency (RF), to a second signal having a second frequency, such as a RF or a an IF frequency, by means of a third signal having a third frequency generated by e.g. a local oscillator (LO). The mobile telephone 1 comprises a
10 first antenna 10 and a second auxiliary antenna 11. A microphone 12, a loudspeaker 13, a keypad 14, and a display 15 provide a man-machine interface for operating the mobile telephone 1.

The mobile telephone may in operation be connected to
15 a radio station 20 (base station) of a mobile communication network 21, such as a GSM, UMTS, PCS, and/or DCS network, via a first radio link 22 by means of the first antenna 10. Furthermore, the mobile telephone 1 may in operation establish a second wireless link to a peripheral device 30
20 via second wireless link 31 by means of the auxiliary antenna 11. The second link 31 is e.g. a Bluetooth® link, which is established in the 2.4 (2.400-2.4835) GHz frequency range. To establish the wireless links 22, 31, the mobile telephone 1 comprises radio resources, which are
25 adapted according to the relevant technologies. Thus, the mobile telephone 1 comprises one radio access means, such as a transceiver, for communicating with the base station 20, and one radio access means for communicating with the peripheral device 30.

30 The peripheral device 30 may be any device having wireless communicating capabilities, such as according to Bluetooth® technology or any other wireless local area network (WLAN) technology. It comprises an antenna 32 for exchanging signals over the second link 31, and a
35 transceiver (not shown) adapted according to the

communication technology that the peripheral device 30 uses. The device may be a wireless headset, a remote server, a fax machine, a vending machine, a printer etc. A wide variety of electronic equipment may have such communication capabilities and have a need for wirelessly transferring of data.

Fig. 2 is a block diagram of a passive mixer 100 according to the invention. The mixer 100 is a frequency-translating mixer for down-converting radio frequency (RF) signal to an intermediary frequency (IF) signal. Alternatively, the mixer 100 up-converts an IF signal to an RF signal. The mixer 100 comprises a mixing means 110, a first terminal 120, a second terminal 130, and a third terminal 140. At the first terminal 120 will a RF signal either be an input signal (in a receiver mixer) or an output signal (in a transmitter mixer). At the third terminal 140 there will be provided an IF signal, which can either be an input signal (in a transmitter mixer) or an output signal (in a receiver mixer). At the second terminal 130 there will be provided a local oscillator (LO) signal, which has a frequency for converting either the IF signal or the RF signal.

The second terminal 130 is operatively connected to a voltage supply 210 being a local oscillator (LO), which provides a signal having a third frequency suitable for providing the RF or IF signal. The voltage supply 210 is referenced to grounding means, such as the substrate on which it is provided. A high pass filter component 160b may be provided in the signal path between the second terminal 130 and the mixing means 110, said high pass filter component passes the high frequency signal from the voltage supply 210 to the mixing means and prevents low frequency signals from the third terminal 140 to enter the voltage supply 210.

The mixer 100 further comprises a feedback circuit 150 connected to the third terminal 140 to the connection between the high pass filter component 160b and the mixing means 110. The feedback circuit 150 may comprise a feedback
5 filter 160 (low-pass filter) for allowing low-frequency signals from the third terminal to be fed back. Said feedback filter 160 comprises a low-pass filter component 160a, which passes low-frequency signals from the third terminal to the mixing means 110, and the high-pass filter
10 component 160b for passing high frequency signals from the voltage supply 210.

Fig. 3 illustrates one embodiment of the mixing means 110 and the feedback filter 160 for a receiver or a transmitter radio front-end. The mixing means 110 comprises
15 a FET transistor 111, such as a MOSFET, having its drain connected to the first terminal 120, its gate operatively connected to the second terminal 130 via a capacitor 162, and its source connected to the third terminal 140. As the MOSFET transistor is symmetrical, the drain and source,
20 whenever mentioned in this description, may be interchanged.

The mixing means 110 provides a voltage switch for providing mixing of the RF signal and the LO signal, or mixing of the IF signal and the LO signal. The MOS
25 transistor 111 has true voltage switch characteristics. Therefore, it is possible to provide switching in the voltage domain. This makes it possible to reduce the DC current flow through the transistor 111, and thereby avoid the 1/f noise which would be a problem especially for
30 direct conversion and low IF-receiver characteristics.

In the embodiment of Fig. 3 the transistor 111 is provided as a field effect transistor (FET), such as a NMOS transistor. The NMOS transistor has better switch
performance than the PMOS transistor due to the better
35 mobility of electrons than holes. However, the transistor

may alternatively be provided using a PMOS transistor. Other voltage controlled switches, such as the junction field effect transistor (JFET) may still alternatively be utilized as the mixing means.

5 To take care of the non-linearity problem of the prior art, the feedback circuit 150 will cause the gate voltage to follow the low frequency output potential variations. The feedback filter 160 is adapted to pass a low-frequency difference component (RF-LO) of the IF
10 signal, and filter out a high frequency addition component (RF+LO) of said IF signal. The low-frequency component will be fed to the gate of the transistor 111, which will be modulated by the low frequency component of the IF signal together with the LO signal. By providing the bootstrapping
15 feedback circuit 150, the transistor will be independent of the high-frequency component of the IF signal, which makes the mixer 100 more linear. The switching instant of the transistor 111, i.e. when the transistor switches from a non-conducting to a conducting state, is dependent on the
20 gate-source voltage V_{gs} . If the IF signal at the source electrode V_s varies, V_{gs} will vary. The feedback circuit 150 makes the overdrive voltage, which is dependent on V_{gs} , independent of the IF signal. The feedback filter 160 will also prevent LO to IF leakage.

25 The feedback filter 160 may be provided in a number of ways. In Fig. 3, a first order filter is provided using a resistor 161 and a capacitor 162. The capacitor 162 is connected between the second input terminal 130 and the transistor gate. The resistor 161 is connected between the
30 third terminal 140 and the connection between the capacitor 162 and the transistor gate. Alternative filter solutions may be higher order passive filters or active filters.

Fig. 4 illustrates an embodiment wherein the present invention comprises a passive balanced mixer 300 for down-
35 converting an IF signal having an even number of

transistors. The mixer 300 is connected to a low noise amplifier (LNA) stage 400 providing the RF signal. In this implementation, the RF signal and the IF signal are differential signals. However, the IF and RF signals may alternatively be single ended. The balanced mixer is desired for on chip implementation as it provides less disturbance (noise) and cancellation of even and odd non-linearity. The balanced mixer 300 may also be implemented in a transmitter for up-converting an IF signal. The mixer 300 comprises in this embodiment four mixing means 310, 320, 330, 340. Said mixing means have essentially the same configuration as the mixing means disclosed in Fig. 3. Consequently, each transistor 310, 320, 330, 340 is provided as a FET transistor. The feedback circuits 311, 321, 331, 341 are connected between source and gate of the first and second transistors 310, 320, and between gate and drain of the third and fourth transistors 330, 340, respectively. Also, filters are provided by resistors 312, 322, 332, 342 and capacitors 313, 323, 333, 343. The balanced mixer 300 comprises first and second terminals 350, 351 for receiving (or providing in the case of a transmitter mixer) an RF signal. The capacitor 313 connected to the first transistor 310 is also connected to the capacitor 343 connected to the fourth transistor 340. At the connection between said capacitors 313, 343 a negative LO or translation signal, LO^- , is provided, which has a required frequency for frequency translating an input RF signal. Thus the input terminals of the filter capacitors 313, 323, 333, 343 correspond to the second terminal 130 of Fig. 3. The capacitor 323 connected to the second transistor 320 is also connected to the capacitor 333 connected to the third transistor 330. The source of the first transistor 310 is connected to the drain of the third transistor 330. The source of the second transistor 320 is connected to the drain of the fourth transistor 340.

At the connection between said capacitors 323, 333, there is provided a positive LO or translation signal, LO^+ , which has a required frequency for frequency translating a RF signal. A positive output terminal 352 is connected to the source of the first transistor 310 and the drain of the third transistor 330, for providing a positive IF signal, V_{IF+} . A negative output terminal 353 is connected to the source of the second transistor 320 and the drain of the fourth transistor 340, for providing a negative IF signal, V_{IF-} . The output terminals 352, 353 will be input terminals when the mixer is provided in a transmitter.

The LNA 400 comprises first and second input terminals 401, 402 for receiving a differential input RF signal V_{RF+} and V_{RF-} , respectively. The first input terminal 401 is connected to a capacitor 410 being connected to the source of a first LNA transistor 411 providing a first amplifying means. Said source is also operatively referenced to supply, V_{dd} , via an inductor 412. The gate of the first LNA transistor 411 is referenced to grounding means. The second input terminal 402 is connected to a capacitor 420 being connected to the source of a second LNA transistor 421 providing a second amplifying means. Said source is also operatively referenced to supply, V_{dd} , via a second inductor 422. The gate of the second LNA transistor 421 is referenced to grounding means. The drain of the first LNA transistor 411 is connected to a positive output terminal 430, and the drain of the second LNA transistor 421 is connected to a negative output terminal 431. Third and fourth inductors 432, 433 are provided between grounding means and the LNA output terminals 430, 431, respectively. The output terminals 430, and 431 of the LNA 400 are connected to the input terminals 350, and 351 of the mixer 300, respectively.

The LNA 400 is arranged as a common gate configuration, which provides a broadband matching for the

differential input. A common gate configuration is used to achieve a 50Ω input matching. The input resistance is approximately $1/g_m$, where g_m is the transconductance of the LNA transistors 411, 421. In the embodiment of Fig. 4, PMOS transistors are chosen as the LNA transistors 411, 421 for biasing reasons. Since the LO signal provided by the mixing means 300 shown in Fig. 4 will have a maximum voltage swing from ground to 2V, for a voltage supply of 1V, it is best for the NMOS transistors 310, 320, 330, 340 of the mixing means 300 to have a DC output level equal to zero, as set out above. This will maximize the gate-source voltage, which is important for the mixer noise and linearity. The LNA transistors 411, 421 are biased by the inductors 412, 422, which maximizes the signal level that can be handled at the output, resulting in improved linearity. Due to the inductors 432, 433 at the output terminals 430, 431, these nodes will be able to reach negative voltages down to the knee voltage of the drain diodes of the transistors 310, 320, 330, 340 of the mixing means 300. Parallel with the third and fourth inductors 432, 433 there will be parasitic capacitances 440, 441 present, as is illustrated with dotted lines.

In one exemplifying embodiment of the invention, the mixing means 300 and LNA 400 are designed for a fully integrated 1V 0.25 μ m CMOS 2.4 GHz Bluetooth® radio front-end for low IF. The sizing of the components of the mixing means 300 are:

Resistors 1k Ω ;
Capacitors 1pF; and
transistors width 50 μ m,
length 0.25 μ m.

The sizing of the components of the LNA 400 are:

capacitors 1pF;
bias inductors 7nH;
output inductors 6nH;

parasitic capacitance 100fF; and
transistors length 350 μm
 width 0.25 μm .

The measurement results of the circuit of Fig. 4 are
5 depicted in Fig. 5. The linearity was measured with a two-
tone test with a LO frequency equal to 2.467 GHz, in IF
fundamental at 7 MHz and an IM_3 (third-order
intermodulation product) at 6MHz. The results are plotted
in Fig. 5, wherein the measurement results of the inventive
10 mixer are shown with a solid line and the results of an
equivalent mixer without bootstrapping are shown with a
dashed line. As can be seen from the graph, the front-end
using bootstrapping according to the invention has an IM_3
lowered by about 10dB, which results in an IIP3 (third
15 order input intercept point), improved by 5dB. At the same
time, the fundamental IF of the front end using
bootstrapping is slightly better than for the front-end
without.

The exemplifying sizing of the mixer 300 and LNA 400
20 of Fig. 4 should not be taken as limiting the scope of the
invention. The invention may be provided in a wide variety
of implementations, wherein the sizing of the circuit has
to be tested and evaluated in each particular case.

In the above, reference has been made to RF and IF
25 frequencies. However, the invention is not limited to RF
and IF frequencies, but can be used in any configuration
wherein a first signal having a first frequency is to be
converted to a second signal having a second frequency.

The present invention has been described above with
30 reference to specific embodiments. However, other
embodiments than the above described are equally possible
within the scope of the invention. The different features
of the invention may be combined in other combinations than
those described. The invention is only limited by the
35 appended patent claims.

CLAIMS

1. A passive mixer (100; 300) for converting a first signal having a first frequency to a second signal having a second frequency, comprising:

5 mixing means (110; 310, 320, 330, 340), a first terminal (120), a second terminal (130) and a third terminal (140), for providing the second signal by mixing a third signal having a third frequency provided as input at said second terminal and the first signal provided as input at either the first or the third terminal;

characterized by

a feedback circuit (150; 311, 321, 331, 341) operatively connected to said third (140) and said second terminal (130).

2. The mixer according to claim 1, characterized in that the feedback circuit (150; 311, 321, 331, 341) is a bootstrap circuit.

3. The mixer according to claim 1 or 2, characterized in that the feedback circuit (150; 311, 321, 331, 341) comprises a low pass filter (160).

4. The mixer according to claim 3, characterized in that the filter (160) comprises a capacitor (162, 313, 323, 333, 343) connected between said second terminal and said mixing means, and a resistor (161; 312, 322, 332, 342) connected between said third terminal and the connection between said capacitor and said mixing means.

5. The mixer according to any of the previous claims, characterized in that said mixing means is a voltage controlled switch.

6. The mixer according to any of the previous claims, characterized in that said mixing means comprises a FET transistor switch (111; 310, 320, 330, 340) having either its drain or source operatively connected to said first terminal, its gate operatively connected to said second terminal, and either its source or drain operatively connected to said third terminal.

7. The mixer according to claim 6, characterized in that said FET transistor is a NMOS transistor.

8. The mixer according to any of the previous claims, characterized in that the mixer is a balanced mixer comprising an even number of mixing means.

9. Use of the mixer according to any of the claims 1-8 in electronic equipment (1, 30).

10. Use according to claim 9, wherein the electronic equipment is a portable communication equipment (1, 30) having a supply voltage of less than 2V.

11. Use according to claim 9 or 10, wherein the electronic equipment is a mobile radio terminal, a mobile telephone (1), a pager, or a communicator.

12. Use according to claim 9, wherein the electronic equipment is adapted to operate in a wireless local area network.

13. Use according to claim 9 or 10, wherein the mixer is used in a communication equipment (30) adapted to provide short-range supplementary communication according to Bluetooth® technology.

14. Apparatus comprising the mixer (300) according to any of the claims 1-8, said mixer is connected to a low noise amplifier (LNA) (400) comprising:

5 a first input terminal (401) connected to a first capacitor (410) being connected to a first amplifying means (411), said first amplifying means is connected to a first output terminal (430) and to voltage supply via a first inductor (412);

10 a second input terminal (402) connected to a second capacitor (420) being connected to a second amplifying means (421), said second amplifying means is connected to a second output terminal (431) and to voltage supply via an second inductor (422); and

15 wherein the first and second amplifying means (411, 421) are referenced to grounding means, and the first and second output terminals (430, 431) are referenced to said grounding means via third and fourth inductors (432, 433).

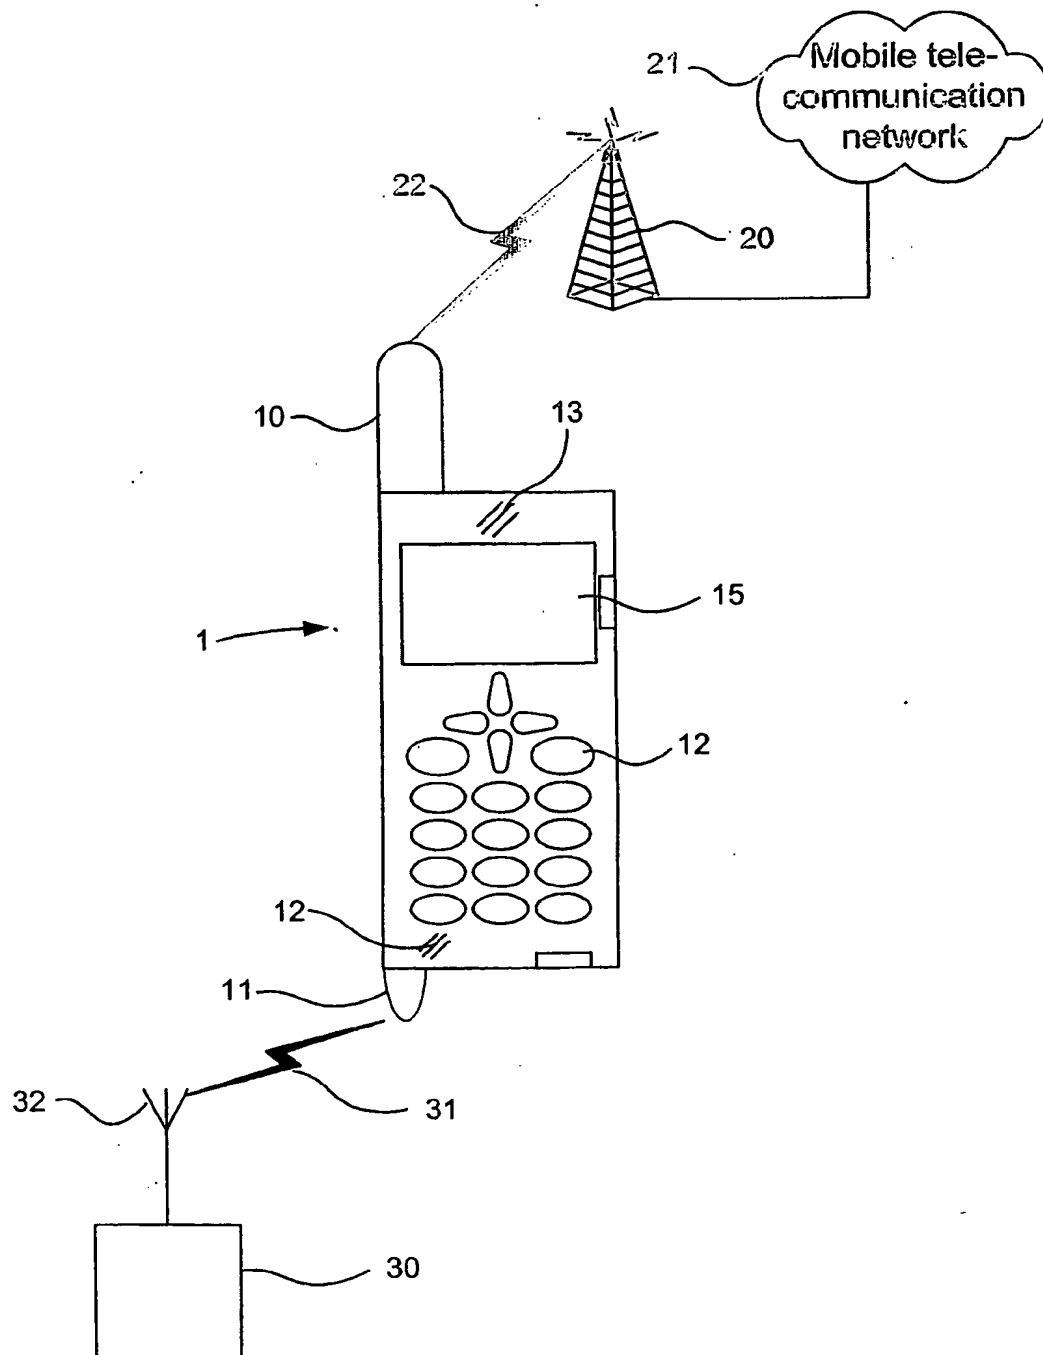


Fig. 1

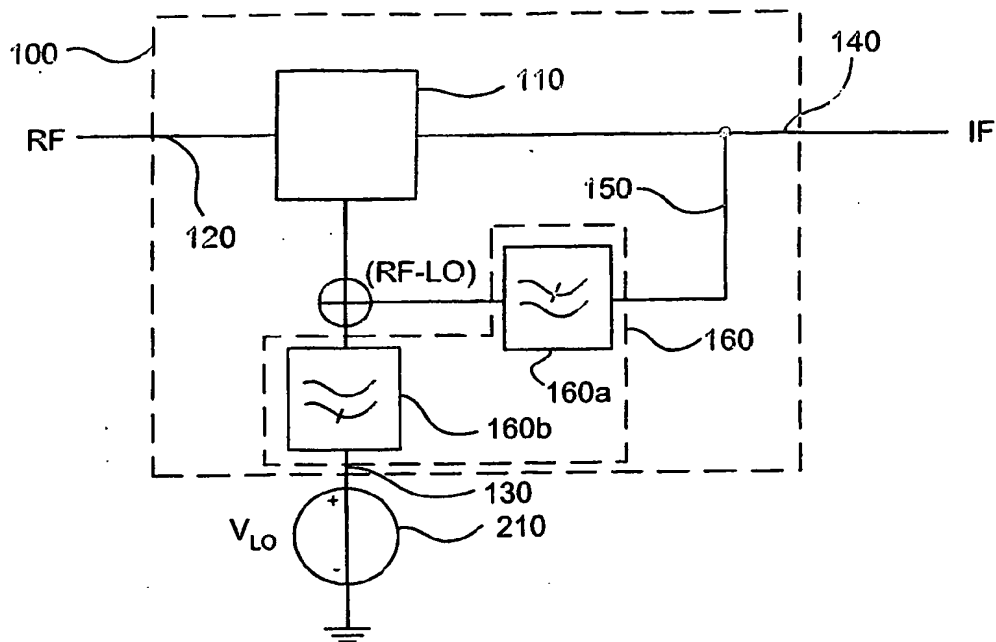


Fig. 2

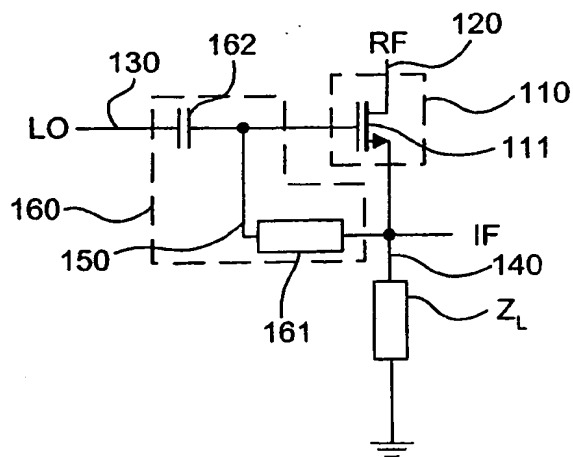


Fig. 3

10/549692

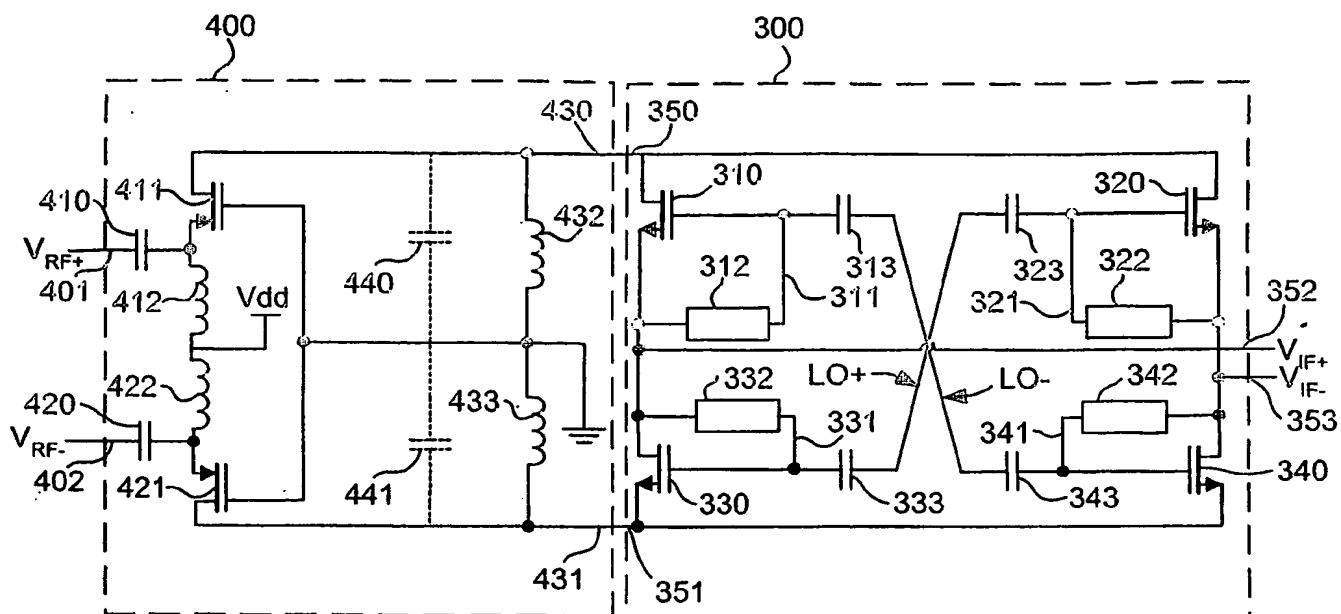


Fig. 4

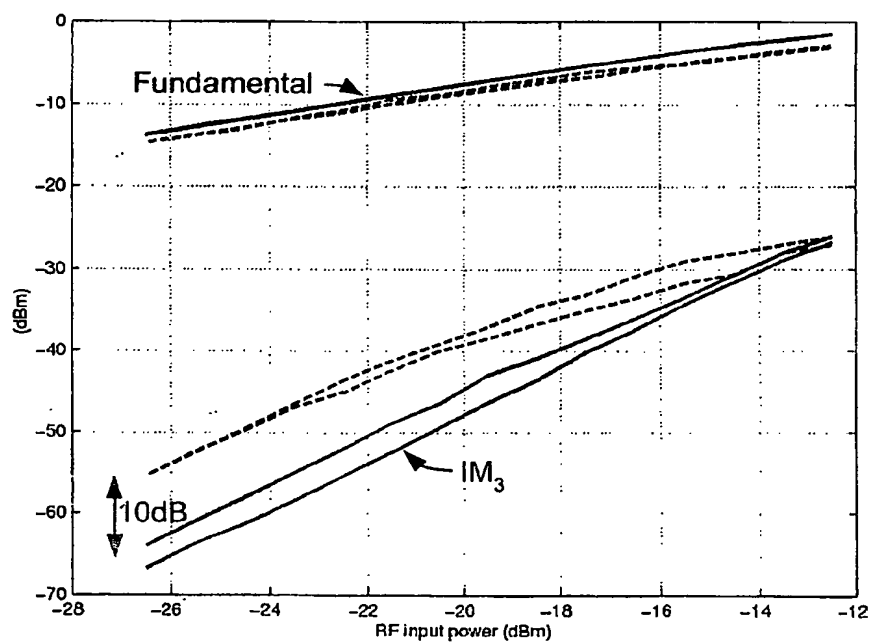


Fig. 5

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/002654

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H03D7/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 H03D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 606 738 A (ONODERA KIYOMITSU ET AL) 25 February 1997 (1997-02-25) column 15, line 3 - line 18; figures 7A-7F, 15	1-5
X	US 3 694 756 A (CARLSON DAVID JOHN) 26 September 1972 (1972-09-26) column 4, line 33 - line 46; figure 2	1-5
X	US 6 400 777 B1 (STRAKOVSKY LEONID) 4 June 2002 (2002-06-04) figure 3	1,8
A	EP 1 119 102 A (SANYO ELECTRIC CO) 25 July 2001 (2001-07-25) column 12, line 42 - column 13, line 4; figures 1,12 column 17, line 52 - column 19, line 30	1,9,10
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

24 June 2004

Date of mailing of the international search report

05/07/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Ratajski, A

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2004/002654

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 060 298 A (KUMAR MAHESH ET AL) 22 October 1991 (1991-10-22) figure 6 -----	1, 14

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2004/002654

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5606738	A	25-02-1997	JP 7235836 A JP 7273557 A	05-09-1995 20-10-1995
US 3694756	A	26-09-1972	AT 339958 B AT 404071 A BE 766978 A4 CA 997001 A1 DE 2122658 A1 ES 390856 A2 FR 2100642 A6 GB 1348789 A IT 976362 B JP 51035090 B MY 20776 A NL 7106446 A ZA 7103007 A	25-11-1977 15-03-1977 01-10-1971 14-09-1976 25-11-1971 01-07-1973 24-03-1972 20-03-1974 20-08-1974 30-09-1976 31-12-1976 15-11-1971 26-01-1972
US 6400777	B1	04-06-2002	US 2002071495 A1	13-06-2002
EP 1119102	A	25-07-2001	JP 2001203542 A EP 1119102 A2 US 2001008383 A1	27-07-2001 25-07-2001 19-07-2001
US 5060298	A	22-10-1991	NONE	